

## PRODUCT SERVICE BULLETIN

We issue the PSB 001/2016 in accordance with some pilot's requests, needed to much force to pull out the spectra ripcord. We recommend a measuring and pull force test to be performed before next jump. Ask your rigger to do it. Replacement of the Ripcord must be performed on next scheduled repack.

Procedures to be followed:

1. Assemble your rescue canopy. Insert the ripcord into the housing and place the reserve handle in the pocket. Lock the loop with a pin, so you don't need to repack it again.



2. Pull fully the Spectra line and measure the length. It should be between 1 <sup>1</sup>/<sub>2</sub>" and 2" inches (5, 5 cm) from the loop to the end of the line. But not more than 2" inches (Figure 1 and figure 2)



Fig. 1


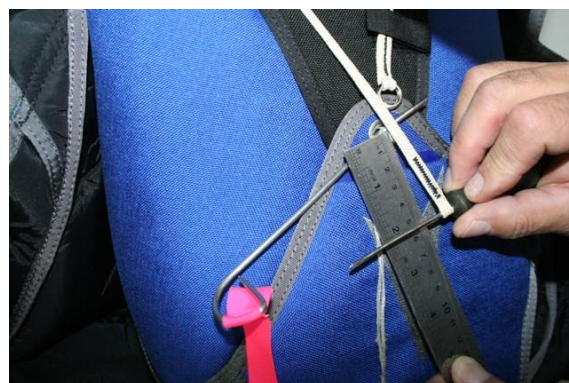


Fig. 2

**APS**

**Advanced Parachute Systems Ltd.**  
Bulgaria, 3400 - Montana , Zahari Stoianov str.44  
Tel. +359 96 300 235  
www.avalonskydive.com  
e-mail: info@avalonskydive.com

3. If the length is more than 2" (5,5 cm) please contact our team for future assistance.  
info@avalonskydive.com

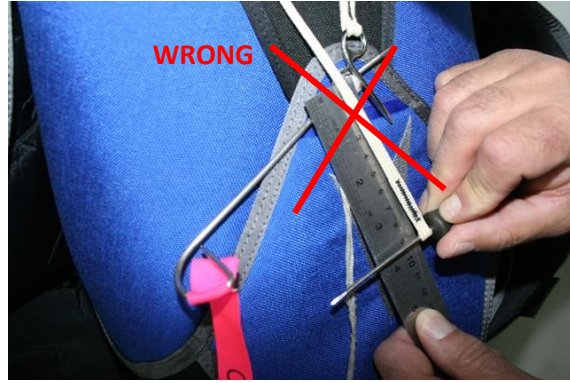

**!!! MAXIMUM ALLOWABEL PULL FORCE ON THE RESERVE RIPCORD IS 22 POUNDS (10 KG ) !!!**

**APS**

**Advanced Parachute Systems Ltd.**  
Bulgaria, 3400 - Montana , Zahari Stoianov str.44  
Tel. +359 96 300 235  
www.avalonskydive.com  
e-mail: info@avalonskydive.com